


PLAN

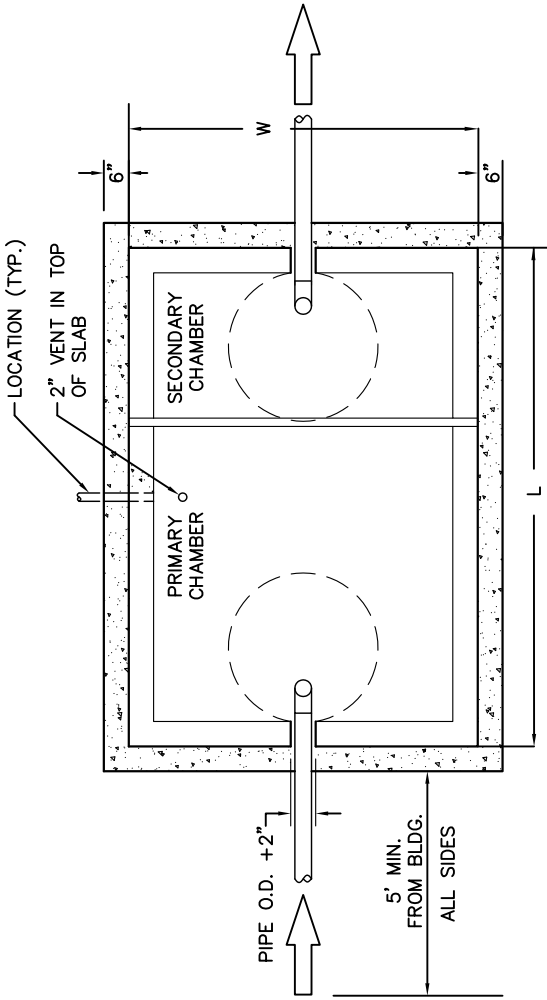


CAPACITY CHART

Rated Capacity	DIMENSIONS (INCHES)				
	W	L	A	B	E
300	48"	72"	48"	24"	7"
750	48"	96"	64"	32"	13"
1000	72"	108"	72"	36"	10"
1500	72"	120"	80"	40"	13"

TOP OF VAULT BELOW FINISHED GRADE OR AT GRADE. IF BELOW GRADE, RING AND COVER SHALL BE ADJUSTED TO FINAL GRADE USING A MINIMUM OF 4" GRADE RING(S) AND A MAXIMUM OF 36" GRADE RING(S). A CONE IS REQUIRED FOR GREATER.

PRECAST REINF. CONC. TOP SLAB (REMOVABLE) LIFTING RINGS AT 4 CORNERS

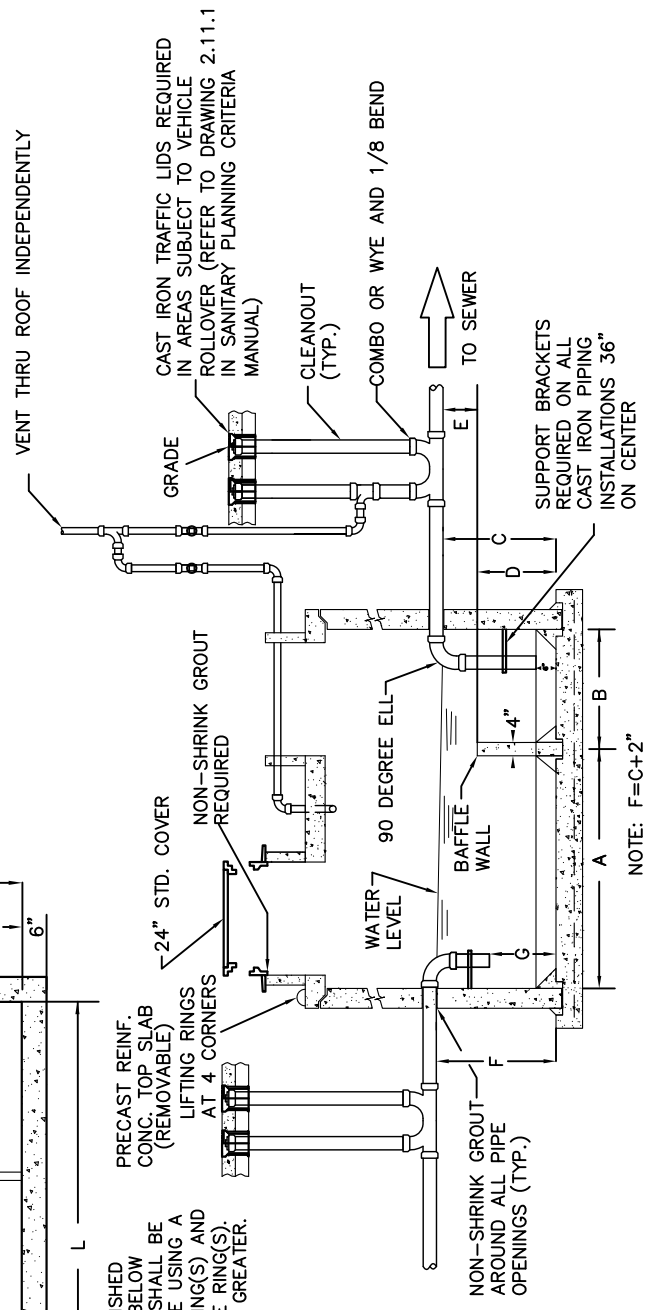

SECTION

CITY AND COUNTY OF DENVER
DEPARTMENT OF PUBLIC WORKS
WASTEWATER MANAGEMENT DIVISION

Issue Date: JAN. 2013
Drawn By: DSA
Checked By:

Sand/Oil Interceptor

REVISED	
BY	DATE

Sand/ Oil Interceptor